
MIP & SMD FC

XGS 1.5 outdoor ICND1069

Option ID 1042 · XGS · 1.50 mm pitch

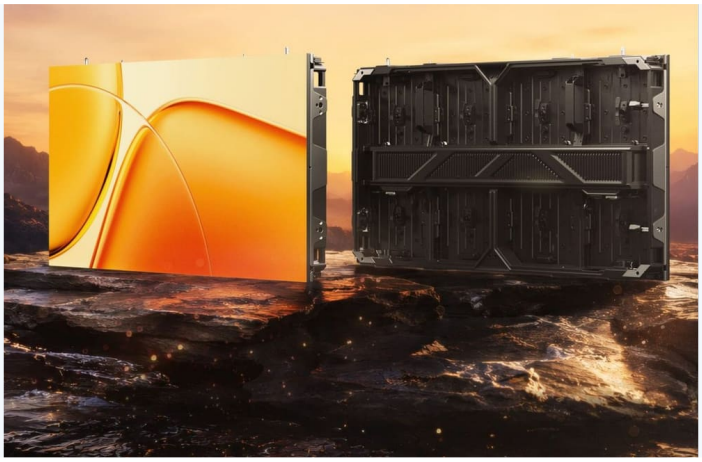

XG+ AND XGS+ OUTDOOR CABINET, FRONT AND REAR

OPTICAL & PERFORMANCE

LED technology	**SMD FC**
Pixel pitch	**1.5 mm**
LED package	**flip chip 1010**
Brightness	**4000 nit**
Refresh rate	**3840 Hz**
Max frame rate	**60 Hz**
Colour processing	**14 bit**
Scan direction	**horizontal**
Viewing angle H / V	**160° / 160°**

MECHANICAL

Cabinet (W x H x D)	**480 x 540 x 66 mm**
Module (W x H)	**240 x 270 mm**
Cabinet resolution	**320 x 360 px**
Cabinet area	**0.2592 m²**
Cabinet weight	**9.5 kg**
Cabinet material	**Die-Cast**
Power max / typ.	**690 / 240 W/m²**
Heat dissipation	**2,354 BTU/h/m²**
IP rating	**IP65**
Condition	**outdoor**

ELECTRICAL, ENVIRONMENTAL & COMPLIANCE

Working temperature	**-20°C~+50°C**
Working humidity	**10~90%RH**
AC input	**100V~240V, 60 Hz**
Typical lifetime	**100000 h**