MIP & SMD FC

XG+ 3.75 outdoor ICND2153S

Option ID 1056 · XG+ · 3.75 mm pitch

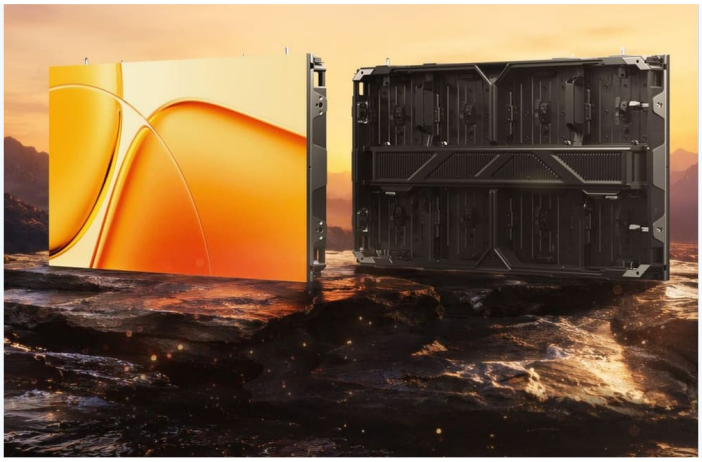

XG+ AND XGS+ OUTDOOR CABINET, FRONT AND REAR

OPTICAL & PERFORMANCE

LED technology	**SMD**
Pixel pitch	**3.75 mm**
LED package	**1820**
Brightness	**4500 nit**
Refresh rate	**7680 Hz**
Max frame rate	**60 Hz**
Colour processing	**14 bit**
Scan direction	**horizontal**
Viewing angle H / V	**160° / 160°**

MECHANICAL

Cabinet (W x H x D)	**960 x 540 x 74.6 mm**
Module (W x H)	**240 x 270 mm**
Cabinet resolution	**256 x 144 px**
Cabinet area	**0.5184 m²**
Cabinet weight	**18.5 kg**
Cabinet material	**Die-Cast**
Power max / typ.	**720 / 216 W/m²**
Heat dissipation	**2,457 BTU/h/m²**
IP rating	**IP65**
Condition	**outdoor**

ELECTRICAL, ENVIRONMENTAL & COMPLIANCE

Working temperature	**-20°C~+50°C**
Working humidity	**10~90%RH**
AC input	**110V~220V, 50~60 Hz**
Typical lifetime	**100000 h**
Certifications	**Pantone** **Pantone Skin Tone**